


TYPE 10 CUP RING

12 m/s → 2,5 bars

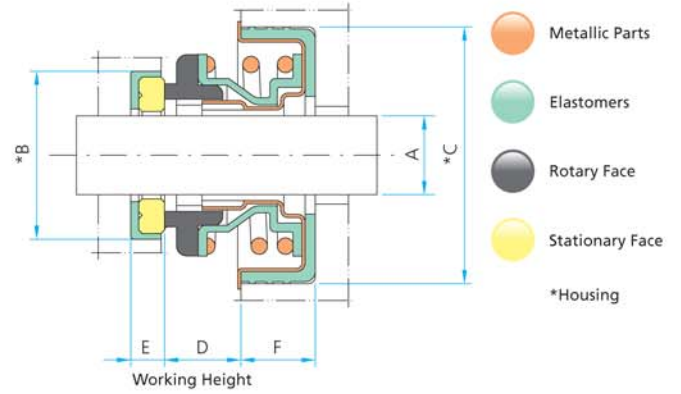

Item	SEAL CODES							Ø Shaft (mm)	Ø A (mm) ± 0,05	Ø B (mm) ± 0,05	Ø C (mm) ± 0,05	D (mm) ± 0,2	E (mm) ± 0,2	F (mm) ± 0,2	Application						
	Type and Shaft	Rotary Set	Elastomer			Rotary Face										Metal Parts	Stationary Seat	Stationary Set			
1	1012	F	B NBR	E E.P.D.M.	V Viton®	P Graphite Injected	U Machined Graphite	S Silicon Carbide	4 Stainless Steel 304	6 Stainless Steel 316	R Ceramic	S Silicon Carbide	C	20	20,00	35,00	45,0	6,1	5,00	11,3	